






## FIXED FLANGES TEE TYPE W

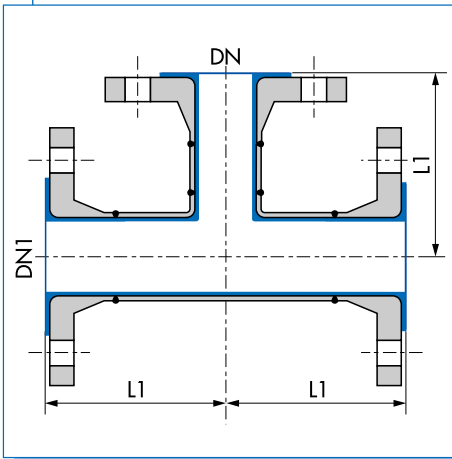

## FIXED FLANGES TEE TYPE P

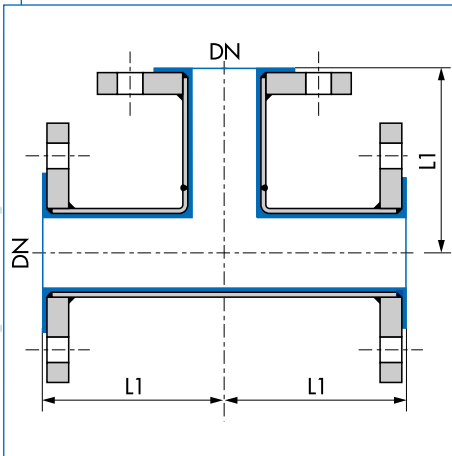

## \* ISO FIXED FLANGE TYPE W

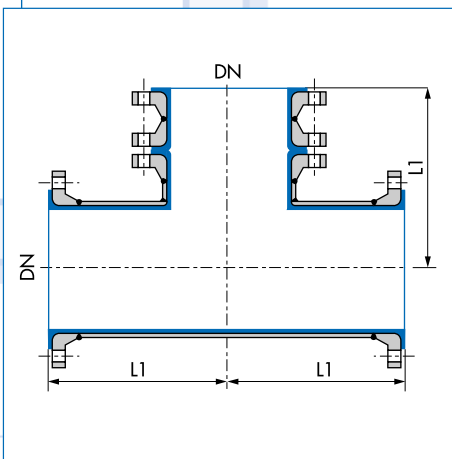

DN	L1 mm	Weight Kg	Reference															
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
15	85	2.6	D	1	-	-	T	E	-	-	-	-	-	-	-	-	H	
20	95	3.6	D	1	-	-	T	E	-	-	-	-	-	-	-	-	J	
▲ 25	110	4.5	D	1	-	-	T	E	-	-	-	-	-	-	-	-	K	
▲ 32	130	6.6	D	1	-	-	T	E	-	-	-	-	-	-	-	-	L	
▲ 40	150	7.7	D	1	-	-	T	E	-	-	-	-	-	-	-	-	M	
▲ 50	120	9.7	D	1	-	-	T	E	-	-	-	-	-	-	-	-	N	
65	140	12	D	1	-	-	T	E	-	-	-	-	-	-	-	-	O	
▲ 80	165	16	D	1	-	-	T	E	-	-	-	-	-	-	-	-	P	
100	205	20	D	1	-	-	T	E	-	-	-	-	-	-	-	-	Q	
125	245	30	D	1	-	-	T	E	-	-	-	-	-	-	-	-	R	
150	285	40	D	1	-	-	T	E	-	-	-	-	-	-	-	-	S	
200	365	74	D	1	-	-	T	E	-	-	-	-	-	-	-	-	T	
250*	450	120	D	1	-	-	T	E	-	-	-	-	-	-	-	-	U	
300*	525	162	D	1	-	-	T	E	-	-	-	-	-	-	-	-	V	
350**	600	231	D	1	-	-	T	E	-	-	-	-	-	-	-	-	W	
400**	680	320	D	1	-	-	T	E	-	-	-	-	-	-	-	-	X	
450**	680	385	D	1	-	-	T	E	-	-	-	-	-	-	-	-	Y	
500**	830	473	D	1	-	-	T	E	-	-	-	-	-	-	-	-	Z	
600**	830	552	D	1	-	-	T	E	-	-	-	-	-	-	-	-	B	

▲ Ductile iron parts available

## LININGS

- > PFA : DN 15 - DN 80
- > ANTI STATIC PFA : DN 15 - DN 80 : C4 = A
- > PTFE : DN 100 - DN 600
- > ANTI STATIC PTFE : DN 100 - DN 400 : C4 = A

Range and thickness Page 5

Standard construction : Type P : DN 15 to DN 80 and DN 350 to DN 600  
 Type W : DN 100 to DN 300

On request : - 3 loose flanges : C12 = 3  
 - Ductile iron construction ▲ : C13 = F

## \*\* INJECTED FIXED FLANGES TEE TYPE P DUCTILE IRON TEE ▲

