

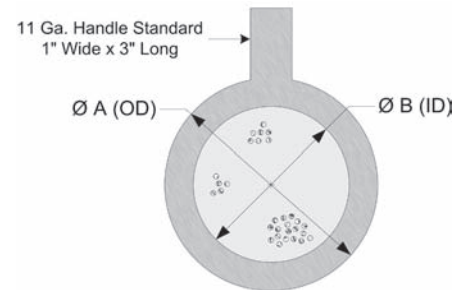


TITAN

TITAN FLOW CONTROL, INC.

Temporary Cone and Basket Type

PS 15 CONE TYPE**PS 16 BASKET TYPE****TOP VIEW**

Nominal Pipe Size	B (ID)	A (OD)				Cone Type with 1/8" Perf. On 3/16" Centers			Basket Type with 1/8" Perf on 3/16" Centers			D
		150/300# ANSI	600# ANSI	900# ANSI	1500# ANSI	L=100%	L=150%	L=200%	L=100%	L=150%	L=200%	
3/4	0.63	2.13	2.50	2.63	2.63	2.25	2.25	3.00	2.00	---	---	0.38
1	0.75	2.50	2.75	3.00	3.00	2.75	2.75	3.00	2.00	---	---	0.50
1 1/2	1.25	3.75	3.63	3.75	3.75	3.19	4.00	5.00	2.75	---	3.00	0.75
2	1.75	4.00	4.25	5.50	5.50	3.50	6.00	8.00	3.00	---	4.00	1.00
2 1/2	2.25	4.75	5.00	6.38	6.38	4.06	6.25	8.00	3.19	---	4.50	1.25
3	2.75	5.25	5.75	6.50	6.75	4.25	6.75	9.00	3.50	3.88	5.50	1.50
4	3.75	6.75	7.50	8.00	8.13	5.00	10.00	12.00	4.00	5.00	7.00	2.00
5	4.63	7.63	9.38	9.63	9.88	6.00	12.00	14.00	5.00	6.38	9.00	2.50
6	5.38	8.63	10.38	11.25	11.00	7.00	13.00	18.00	6.00	7.75	11.00	3.00
8	7.38	10.88	12.50	14.00	13.75	8.19	17.00	23.00	6.13	9.75	14.00	4.00
10	9.38	13.25	15.63	17.00	17.00	12.00	22.00	28.00	7.50	12.38	18.00	5.00
12	11.00	16.00	17.88	19.50	20.38	13.00	26.00	34.00	9.00	14.75	20.00	6.00
14	12.25	17.38	19.00	20.38	22.63	15.00	27.00	36.00	10.00	15.88	21.00	7.00
16	14.00	20.13	21.88	22.50	---	17.00	30.00	40.00	10.00	18.38	23.00	8.00
18	15.75	21.25	23.75	25.00	---	19.00	35.00	46.00	12.00	20.88	27.00	9.00
20	17.50	23.50	26.63	---	---	21.00	39.00	51.00	14.00	23.50	31.00	10.00
24	21.25	27.88	30.88	---	---	25.00	45.00	61.00	16.00	28.38	37.00	12.00

All dimensions in inches.

Larger sizes available, please consult factory.

NOTES:

- Used for start-up of new or revamped piping systems. Designed to provide inexpensive protection for costly valves, pumps, meters, and other mechanical equipment.
- Range in open area of strainer to cross section of pipe from 100% to 300%.
- Standard gauge of strainer material ranges between 11 to 22 depending on hole size. Special thicknesses are available.
- Normally supplied with 1/8" diameter holes on 3/16" centers. Most sizes of perforations available. If mesh lined, please specify flow direction.
- Flanges can be constructed to accommodate raised face or ring joint.



290 Corporate Drive
PO Box 7408
Lumberton, NC 28358

Titan Flow Control, Inc.
www.titanfci.com

Tel: 910-735-0000
Fax: 910-738-3848
titan@titanfci.com