




Short Radius 90° Elbows
STANDARD WEIGHT
 Inches / Pounds

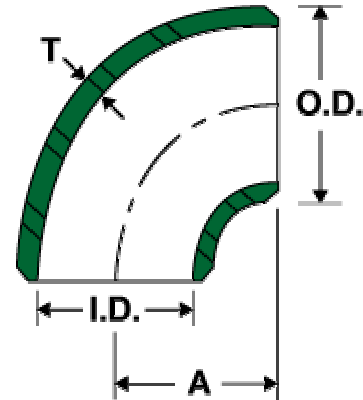

Nominal Pipe Size	Outside Diameter	Inside Diameter	Wall Thickness (T)	Center To End (A)	Pipe Schedule	Weight In Pounds
1	1.32	1.05	.133	1.00	40	0.25
1 1/4	1.66	1.38	.140	1.25	40	0.39
1 1/2	1.90	1.61	.145	1.50	40	0.53
2	2.38	2.07	.154	2.00	40	0.97
2 1/2	2.88	2.47	.203	2.50	40	2
3	3.50	3.07	.216	3.00	40	3
3 1/2	4.00	3.55	.226	3.50	40	4.3
4	4.50	4.03	.237	4.00	40	6.1
5	5.56	5.05	.258	5.00	40	9.7
6	6.63	6.07	.280	6.00	40	16.7
8	8.63	7.98	.322	8.00	40	32.4
10	10.75	10.02	.365	10.00	40	56.3
12	12.75	12.00	.375	12.00	*	79.4
14	14.00	13.25	.375	14.00	30	104
16	16.00	15.25	.375	16.00	30	129
18	18.00	17.25	.375	18.00	*	163
20	20.00	19.25	.375	20.00	20	210
24	24.00	23.25	.375	24.00	20	297
30	30.00	29.25	.375	30.00	*	480
36	36.00	35.25	.375	36.00	*	692
42	42.00	41.25	.375	42.00	*	967
48	48.00	47.25	.375	48.00	*	1,340


- Dimensions conform to ASME B16.9 & material conforms to ASTM A-234 Grade B



Short Radius 90° Elbows

EXTRA STRONG

Inches / Pounds

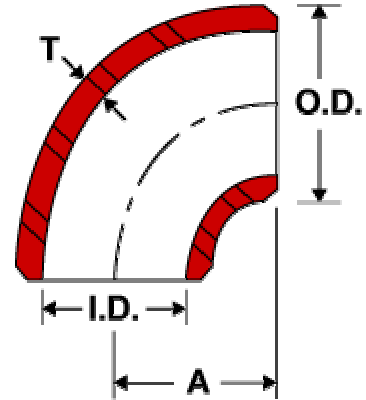

Nominal Pipe Size	Outside Diameter	Inside Diameter	Wall Thickness (T)	Center To End (A)	Pipe Schedule	Weight In Pounds
1 1/2	1.90	1.50	.200	1.50	80	0.75
2	2.38	1.94	.218	2.00	80	1.5
2 1/2	2.88	2.32	.276	2.50	80	2.6
3	3.50	2.90	.300	3.00	80	3.8
3 1/2	4.00	3.36	.318	3.50	80	5.4
4	4.50	3.83	.337	4.00	80	7.6
5	5.56	4.81	.375	5.00	80	13.8
6	6.63	5.76	.432	6.00	80	22.8
8	8.63	7.62	.500	8.00	80	47.3
10	10.75	9.75	.500	10.00	60	71
12	12.75	11.75	.500	12.00	*	104
14	14.00	13.00	.500	14.00	*	137
16	16.00	15.00	.500	16.00	40	171
18	18.00	17.00	.500	18.00	*	214
20	20.00	19.00	.500	20.00	30	277
24	24.00	23.00	.500	24.00	*	390
30	30.00	29.00	.500	30.00	20	634
36	36.00	35.00	.500	36.00	20	913
42	42.00	41.00	.500	42.00	*	1,300
48	48.00	47.00	.500	48.00	*	1,675

- Dimensions conform to ASME B16.9 & material conforms to ASTM A-234 Grade B