




Straight Tees
STANDARD WEIGHT
 Inches / Pounds

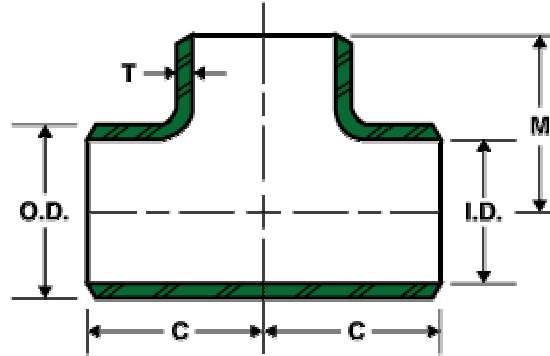

Nominal Pipe Size	Outside Diameter	Inside Diameter	Wall Thickness (T)	Center To End (C)	Center To End (M)	Pipe Schedule	Weight in Pounds
1/2	.84	.622	.109	1.00	1.00	40	.35
3/4	1.05	.824	.113	1.12	1.12	40	.50
1	1.32	1.049	.133	1.50	1.50	40	.75
1 1/4	1.66	1.380	.140	1.88	1.88	40	1.3
1 1/2	1.90	1.610	.145	2.25	2.25	40	1.9
2	2.38	2.067	.154	2.50	2.50	40	3.2
2 1/2	2.88	2.469	.203	3.00	3.00	40	5.8
3	3.50	3.068	.216	3.38	3.38	40	7.2
3 1/2	4.00	3.548	.226	3.75	3.75	40	9.5
4	4.50	4.026	.237	4.12	4.12	40	12.7
5	5.56	5.047	.258	4.88	4.88	40	20.8
6	6.62	6.065	.280	5.62	5.62	40	33.1
8	8.62	7.981	.322	7.00	7.00	40	56.5
10	10.75	10.020	.365	8.50	8.50	40	90.9
12	12.75	12.000	.375	10.00	10.00	*	136
14	14.00	13.250	.375	11.00	11.00	30	162
16	16.00	15.250	.375	12.00	12.00	30	206
18	18.00	17.250	.375	13.50	13.50	*	272
20	20.00	19.250	.375	15.00	15.00	20	350
24	24.00	23.250	.375	17.00	17.00	20	508
30	30.00	29.240	.380	22.00	22.00	*	835
36	36.00	35.240	.380	26.50	26.50	*	1,294
42	42.00	41.240	.380	30.00	28.00	*	1,495
48	48.00	47.240	.380	35.00	33.00	*	2,300


- Dimensions conform to ASME B16.9 & material conforms to ASTM A-234 Grade B



Straight Tees

EXTRA STRONG

Inches / Pounds

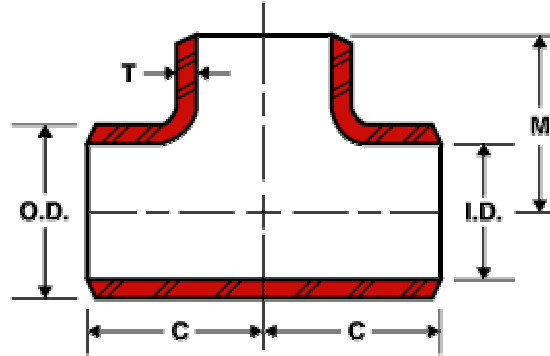

Nominal Pipe Size	Outside Diameter	Inside Diameter	Wall Thickness (T)	Center To End (C)	Center To End (M)	Pipe Schedule	Weight In Pounds
1/2	.840	.546	.147	1.00	1.00	80	.37
3/4	1.050	.742	.154	1.12	1.12	80	.58
1	1.315	.957	.179	1.50	1.50	80	.87
1 1/4	1.660	1.278	.191	1.88	1.88	80	1.6
1 1/2	1.900	1.500	.200	2.25	2.25	80	2.3
2	2.375	1.939	.218	2.50	2.50	80	3.9
2 1/2	2.875	2.323	.276	3.00	3.00	80	6.5
3	3.500	2.900	.300	3.38	3.38	80	9
3 1/2	4.000	3.364	.318	3.75	3.75	80	12.2
4	4.500	3.826	.337	4.12	4.12	80	16.2
5	5.563	4.813	.375	4.88	4.88	80	26.6
6	6.625	5.761	.432	5.62	5.62	80	41.8
8	8.625	7.625	.500	7.00	7.00	80	76.2
10	10.75	9.750	.500	8.50	8.50	60	115
12	12.75	11.75	.500	10.00	10.00	*	169
14	14.00	13.00	.500	11.00	11.00	*	237
16	16.00	15.00	.500	12.00	12.00	40	284
18	18.00	17.00	.500	13.50	13.50	*	353
20	20.00	19.00	.500	15.00	15.00	30	442
24	24.00	23.00	.500	17.00	17.00	*	625
30	30.00	29.00	.500	22.00	22.00	*	1,065
36	36.00	35.00	.500	26.50	26.50	*	1,610
42	42.00	41.00	.500	30.00	28.00	*	1,788
48	48.00	47.00	.500	35.00	33.00	*	2,300

- Dimensions conform to ASME B16.9 & material conforms to ASTM A-234 Grade B